



linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥			
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	
	6	to 10	to 30	to 60	to 100	to 160	to 10		to 100	to	
tolerance		±0.20	±0.30	±0.50	±0.70	±1.00	±1.60		0.10	0.30	0.60

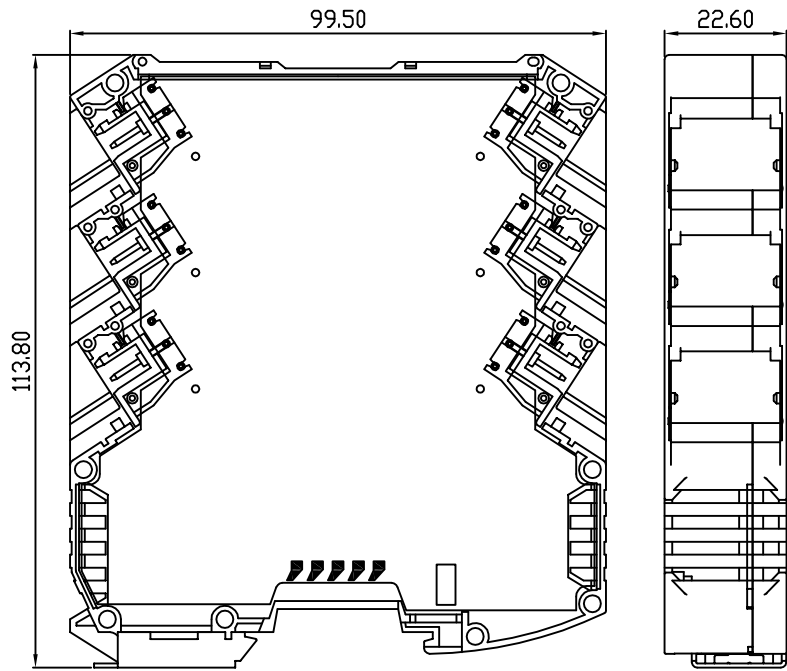

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	22.05.13

UL/CUL 技术参数 UL/CUL Technical Data				
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		-	-	-
额定电流 Rated Current [A]		-	-	-
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]		-		
耐电压 Withstanding Voltage		-		
IEC 技术参数 IEC Technical Data				
过电压类别 Overvoltage Category		III	III	II
污染等级 Contamination Class		3	2	2
额定电压 Rated Voltage [V]		-	-	-
额定电流 Rated Current [A]		-	-	-
额定冲击电压 Impulse withstand voltage <sup>a</sup> [KV]		-	-	-
导线截面积 Conductor cross section				
硬质/柔性导线 Solid/flexible [mm <sup>2</sup> ]		-		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Imflammability		UL94V-0		
导体材料 Contactor Material		-		
导体表面镀层 Contactive Coating		-		
一般参数 Other Data				
间距 Pitch [mm]		-		
极数 Poles [P]		-		
剥线长度 Stripping Length [mm]		-		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		
工作温度 Operating temperatur [°C]		-		
引针尺寸 Pin Dimensions [mm]		-		
PCB板孔径 PCB Hole Diameter [mm]		-		

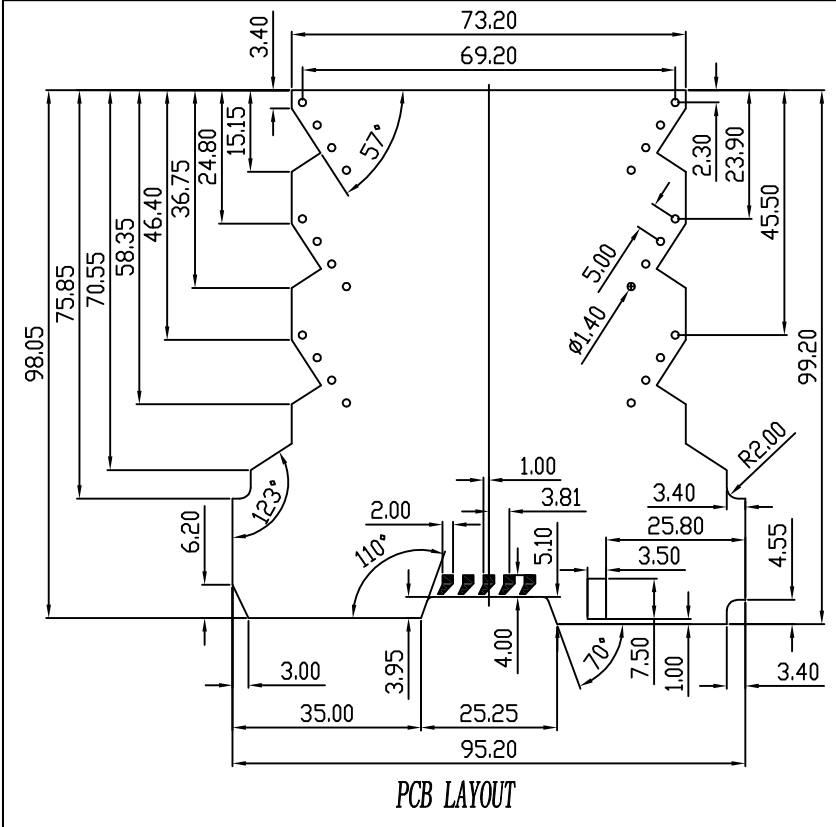

Part No: KFMEX2250  
www.ariaebox.com

DES.	LQQ	DATE	22.05.13	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
CHK.	BY	DATE	22.05.13						
APP.	CLF	DATE	22.05.13						



慈溪市科发电子有限公司  
CIXI KEFA ELECTRONICS CO., LTD

第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
名称 / TITLE	KFMEX2250		